




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 5/20</b>	<b>A1</b>	(11) International Publication Number: <b>WO 98/39914</b> (43) International Publication Date: 11 September 1998 (11.09.98)
(21) International Application Number: PCT/JP98/00920 (22) International Filing Date: 5 March 1998 (05.03.98) (30) Priority Data: 9/51334                      6 March 1997 (06.03.97)                      JP (71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP). (72) Inventors: KAWABATA, Minoru; 3-16-12-507, Tsukahara, Takatsuki-shi, Osaka 569-1046 (JP). TAKESHIMA, Masahiro; 3-15-103-502, Kamihimuro, Takatsuki-shi, Osaka 569-1044 (JP). KAGEYAMA, Atsuhisa; 1-5-5-505, Tenno, Ibaraki-shi, Osaka 567-0876 (JP). SUGIMOTO, Hiroko; 6-1-504, Okahonmachi, Hirakata-shi, Osaka 573-0031 (JP). (74) Agents: TAKIMOTO, Tomoyuki et al.; Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).		(81) Designated States: BR, CN, CZ, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published With international search report.

(54) Title: IMAGE QUALITY CORRECTION CIRCUIT FOR VIDEO SIGNALS

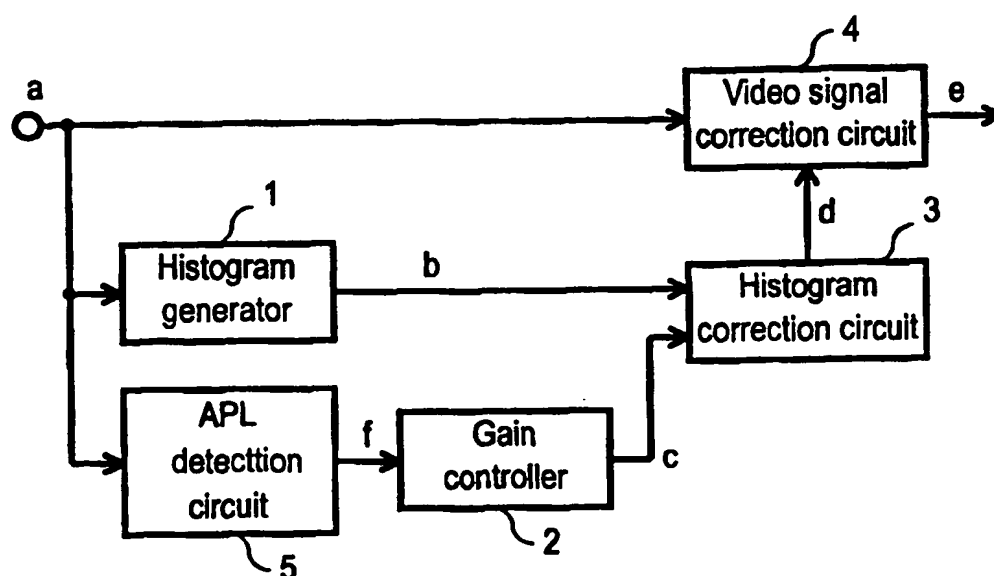

## (57) Abstract

The tone of video signals is corrected without degrading the tone of certain image features, such as a human face. A gain controller operates and outputs an adjustment value using a histogram output produced by a histogram generator. An average value of picture levels on a screen is detected by an average picture level detector. A histogram correction circuit calculates a look-up table, and a video signal correction circuit corrects the tone of the video signals using the look-up table.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## DESCRIPTION

### IMAGE QUALITY CORRECTION CIRCUIT FOR VIDEO SIGNALS

#### FIELD OF THE INVENTION

The present invention relates to the field of image quality correction  
5 circuits for correcting the tone of video images using a histogram of video  
signals.

#### BACKGROUND OF THE INVENTION

Larger and wider screens are becoming increasingly common in  
color television sets, and much research attention is being focused on  
10 improvements in picture quality technology to obtain video images with higher  
picture quality.

A technology for applying a histogram of video signals is disclosed  
in the Japanese Laid-open Patent No. H5-66751. The disclosed technology  
emphasizes picture levels, i.e. levels of the luminance signal, occupying a large  
15 portion of the video signal. This technology improves the image quality and  
attempts to produce high-contrast video images.

An example of tone correction circuits using a histogram of the  
aforementioned prior art is explained next with reference to figures.

Fig. 6 shows a block diagram of a tone correction circuit using the  
20 histogram of the aforementioned prior art. In Fig. 6, a histogram generator 1  
creates a histogram b which indicates the distribution of video signal levels of  
input video signals a. A video signal correction circuit 4 receives the histogram  
output b from the histogram generator 1, and creates and normalizes a  
cumulative histogram. The video signal correction circuit 4 further corrects the  
25 tone of the input video signals a using the normalized data, and outputs  
corrected video signals e.

The operation of the tone correction circuit using the histogram of the prior art as configured above is explained next.

In the circuit shown in Fig. 6, the histogram generator 1 creates, for example, a histogram with four intervals. In this case, if an image of a person standing against a dark background as shown in Fig. 8 is the input, then the histogram output from the histogram generator 1 represents frequencies H1, H2, H3, and H4 corresponding to intervals S1, S2, S3, and S4 as shown in Fig. 7. In Fig. 7, the input video signal level S is plotted along the abscissa and the frequency F is plotted along the ordinate.

More specifically, H1 is a frequency of the picture level falling in S1. Similarly, H2 is a frequency of the picture level falling in S2, H3 is a frequency of the picture level falling in S3, and H4 is a frequency of the picture level falling in S4.

The video signal correction circuit 4 cumulates and normalizes the histogram created as above to produce a cumulative and normalization function such as L1 in Fig. 7. The abscissa T shows the level of the cumulative and normalization function having a maximum value of 1. The video signal correction circuit 4 corrects and outputs the picture level of the input video signals using the cumulative and normalization function L1.

In other words L1 in Fig. 7 shows the characteristic of the input picture level versus the output picture level. Tone correction is achieved using a look-up table created from this characteristic. The 'look-up table' hereafter refers to the input/output picture level characteristic represented, for example, by the cumulative and normalization function L1 in Fig. 7. If the slope of the cumulative and normalization function L1 is steep, the ratio of the output picture level to the input picture level increases, which means that the tone is intensified.

For example, consider the case where video signals are concentrated in picture level S1, and therefore the frequency H1 becomes large. If after cumulation and normalization a look-up table is produced for

correction, then the slope of cumulative and normalization function L1 corresponding to the interval S1 becomes steep. Thus, the contrast of the picture level in the interval S1, where the video signals are concentrated is increased. Accordingly, the tone correction circuit using a histogram of the  
5   aforementioned prior art executes tone correction without modifying the original histogram.

With the above circuit configuration, however, parts of the image important to a user may be reproduced at a lower than optimal tone. This problem can arise in parts of the image a user wishes to pay particular attention  
10   to, such as human faces, because this part of the image only occupies a small area which is attenuated by histogram analysis.

### SUMMARY OF THE INVENTION

A tone correction circuit of the present invention corrects the tone of video signals by using a histogram. The histogram is in turn corrected again  
15   by a controller which is adjustable. The controller is adjusted as required for intensifying the input/output video signal characteristic of the picture level in certain areas of importance to the user. Thus, the tone of video signals is corrected using corrected histograms.

Accordingly, the present invention offers a tone correction circuit for  
20   video signals that corrects the tone by intensifying the contrast of an area which the user may want to pay particular attention to such as human faces.

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a block diagram of a tone correction circuit for video signals in accordance with a first exemplary embodiment of the present invention.

25   Fig. 2 shows a block diagram of a tone correction circuit for video signals in accordance with a second exemplary embodiment of the present invention.

Fig. 3 shows a revised histogram and a lookup table created therefrom by the tone correction circuit for video signals in accordance with the first exemplary embodiment of the present invention.

Fig. 4 shows a revised histogram and a lookup table created therefrom by the tone correction circuit for video signals in accordance with a third exemplary embodiment of the present invention.

Fig. 5 shows a relationship between characteristics of average picture level and gain for histogram correction.

Fig. 6 shows a block diagram of a tone correction circuit using histogram of the prior art.

Fig. 7 shows a revised histogram and a lookup table created therefrom by the tone correction circuit using histogram of the prior art.

Fig. 8 shows an example of input video images.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

### First exemplary embodiment

Fig. 1 shows a tone correction circuit for video signals in a first exemplary embodiment of the present invention comprising a histogram generator 1, gain controller 2, histogram correction circuit (histogram controller) 3, and video signal correction circuit 4. The histogram generator 1 generates the distribution of picture levels, i.e. levels of the luminance signal, of input video signals a in the form of a histogram, and outputs a histogram b. The gain controller 2 outputs an adjustment value c for correcting the histogram. The histogram correction circuit (histogram controller) 3 receives the histogram b and the adjustment value c, and outputs a corrected histogram d for intensifying the frequency of a portion of the image containing the picture level required to display a certain feature contained in the image (e.g. a human face). The video signal correction circuit 4 corrects the tone of the input video signals a using

the corrected histogram d to produce output video signals e.

The operation of the tone correction circuit for video signals as configured above is explained next with reference to the drawings.

First, given an image such as in Fig. 8 (people standing against a dark background) is input to a tone correction circuit as in Fig. 1, the histogram generator 1 creates a histogram b from the input video signals a.

Here, the interval containing the picture level for displaying a human face, for example, in the image corresponds to an interval S3 in Fig. 7. The region S3 is, for example, a region where picture level varies from 50% to 75 %, where the picture level of the input video signal is 100% at maximum and 0% at minimum. The area of the face on a screen is relatively small, and therefore the frequency of the interval S3 is often small compared with the frequencies of intervals S1 and S2 where picture level is lower than in S3 as in Fig. 7. This forms a moderate slope in the lookup table or the cumulative and normalization function for this interval, resulting in a reduction of the contrast of the face.

In the present invention, a certain value is added to the frequency H3 of the interval S3 containing the picture level for displaying the face in the histogram, and then an adjustment value c is subtracted from the frequency of the other intervals. The video signal correction circuit 4 uses this corrected histogram for correcting the input video signals. Accordingly, the frequency H3 of the area S3 containing the picture level for displaying the face is intensified to improve the contrast of this portion.

The solid line in Fig. 3 shows an updated histogram graph F based on corrected histogram d created by the histogram correction circuit (histogram controller) 3 and a cumulative and normalization function L2. The frequency indicated with a dotted line is a histogram output from the histogram generator 1 in Fig. 1, which is the same histogram as the output of the histogram generator 1 of the conventional circuit shown in Fig. 6.

The histogram correction circuit (histogram controller) 3 in Fig. 1 adjusts the frequency level in each interval of the histogram b, and outputs the corrected histogram d. In the histogram, the frequency of the interval containing the picture level corresponding to the face is intensified.

5           The frequency H1 of the interval S1 corresponding to the lowest picture level (darkest) in Fig. 7, for example, is decreased by the adjustment value c to H1' in Fig. 3.

          The adjustment value c is also subtracted from the frequency H2 of the interval S2 to arrive at the new frequency level H2'. The sum of the  
10       adjustments to the frequencies H1 and H2, namely, 2c, is added to the frequency H3 of the interval S3 to arrive at the new frequency H3' for the interval S3. With this adjustment, the frequency H3 of the interval S3, where the picture level for displaying the face is concentrated, is intensified, and the histogram correction circuit 3 (histogram controller) outputs the corrected histogram d to the  
15       video signal correction circuit 4.

          The cumulative and normalization function obtained using the corrected histogram d is shown as a line L2 in Fig. 3. Compared with the cumulative and normalization function L1 (the lookup table representing the cumulative and normalization function shown as L1) in Fig. 7, the cumulative and  
20       normalization function L2 in Fig. 3 (the lookup table) has a steeper slope for the interval of S3; where picture levels for the face are concentrated. Hence, the tone of the face in the image is improved.

          As explained above, this exemplary embodiment enables correction of the signal tone without degrading the tone of certain features in an image,  
25       such as human faces, by correcting the histogram b using an adjustment value c supplied by the gain controller 2.

### Second exemplary embodiment

Fig. 2 shows a tone correction circuit for video signals in a second



exemplary embodiment of the present invention. A difference with the first exemplary embodiment is that an average picture level detection circuit 5 (APL detection circuit) is added to the configuration of the first exemplary embodiment. The average picture level detector 5 detects the average value of the picture levels of the input video signals a, and outputs the average picture level f to the gain controller 2. The other components in Fig. 2 are configured in much the same way as in the first exemplary embodiment, and thus the explanation of their functionality is omitted here.

The operation of the tone correction circuit for video signals as configured above is explained next with reference to the drawings.

In the configuration of the first exemplary embodiment, the tone of the face may be excessively intensified if the aforementioned correction is performed under conditions where the level of the frequency H3 in Fig. 7 is high. For example, in an image where the entire input video image is bright and the average picture level is high. The second exemplary embodiment detects the average picture level from the input video signals a using the average picture level detector 5 to output the average picture level f. The gain controller 2 receives this average picture level f, and outputs the adjustment value c based on the value of f.

Fig. 5 shows a possible dependency of the adjustment value c on the average picture level f. The average picture level f is plotted along the abscissa and the adjustment value c is plotted along the ordinate. The adjustment value c falls to zero (0) when the average picture level f is high, i.e. the tone is not corrected. The adjustment value c is non-zero when the average picture level f is below a correction starting level  $f_0$ . The adjustment value c increases as the average picture level f decreases, but, to prevent excessive correction, it is set so as not to exceed a limit level L as in Fig. 5. The correction starting level  $f_0$ , and the limit level L, as well as the increase ratio of the adjustment value c to the average picture level f (the slope of the line in Fig. 5) can be freely set.

As explained above, this exemplary embodiment enables the correction of the tone in response to the brightness of an image. Correction is performed without degrading the tone of features, such as human faces. Corrections are displayed by modifying the histogram created using the adjustment value calculated from the average picture level by the gain controller 2.

### Third exemplary embodiment

The third exemplary embodiment has the same configuration as the one shown in Fig. 2. Thus, the same effect as that of the second exemplary embodiment is achievable. In particular, the tone of a signal may be corrected without degrading the tone of features such as human faces. However, the slope of the cumulative and normalization function for an interval S1 becomes shallower when the frequency H1' is computed by subtracting the adjustment value c from the frequency H1 in Fig. 3. This results in insufficient intensification of the tone of those areas where most of the video signals are concentrated in some input video images.

To overcome this, the third exemplary embodiment is configured to subtract the adjustment value c from the frequency H2 to arrive at the new frequency H2", the same amount (adjustment value c) is added to the frequency H3, but no modification is made to the frequency H1 as shown by a solid line in Fig. 4. With this configuration, the tone of the interval S3 corresponding to such features as human faces may be improved while simultaneously securing sufficient tone in parts of the image where the picture levels are most concentrated.

### **INDUSTRIAL APPLICABILITY**

The present invention offers a tone correction circuit for video signals that allows for tone correction by intensification of the tone of the picture level corresponding to portions of the image a user may want to pay particular attention to, such as human faces. The tone correction circuit of the

present invention improves the contrast of display devices including color television sets.

In the above explanation, picture levels of video signals serve as both inputs and outputs. The same effect is achievable when a composite video  
5 signal alternatively serves as input and output.

The exemplary embodiments refer to cases where four levels are created in the histogram generator. It is also apparent that the same effect is achievable for more than four levels in the histogram.

**CLAIMS**

1. A correction circuit comprising:

5 histogram generation means for generating a first histogram  
from an input video signal;

gain control means for outputting a first adjustment value for  
correcting said first histogram;

10 histogram correction means for creating a corrected second  
histogram by altering said first histogram based on said first adjustment value;  
and

video signal correction means for correcting the input video signal  
based on said corrected second histogram.

2. A tone correction circuit as defined in Claim 1, further comprising

15 average picture level detection means for detecting an average  
picture level of said input video signal and outputting said average picture level  
to said gain control means; and

wherein said gain control means alters said first adjustment value  
based on said average picture level.

20 3. A tone correction circuit as defined in Claim 1, wherein said video  
signal correction means produces a cumulative and normalization function  
based on said corrected second histogram created by said histogram correction  
means, and alters the input video signal based on said cumulative and  
normalization function.

25 4. A tone correction circuit as defined in Claim 1,  
further comprising average picture level detection means for

detecting an average picture level of said input video signal;

wherein said average picture level detection means outputs a second adjustment value if said average picture level is greater than a correction starting level, and outputs a third adjustment value if said average picture level is smaller than said correction starting level, and said gain control means alters said first adjustment value based on the output of said average picture level detection means.

5                    5. A tone correction circuit as defined in Claim 4, wherein said first adjustment value is restricted by a limit level.

10                   6. A tone correction circuit as defined in Claim 1, wherein said first adjustment value is a constant value.

1/5

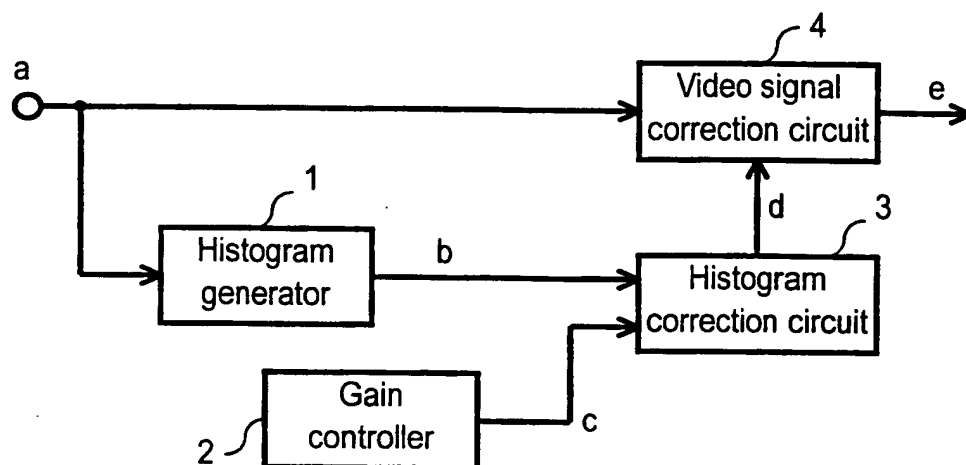


FIG. 1

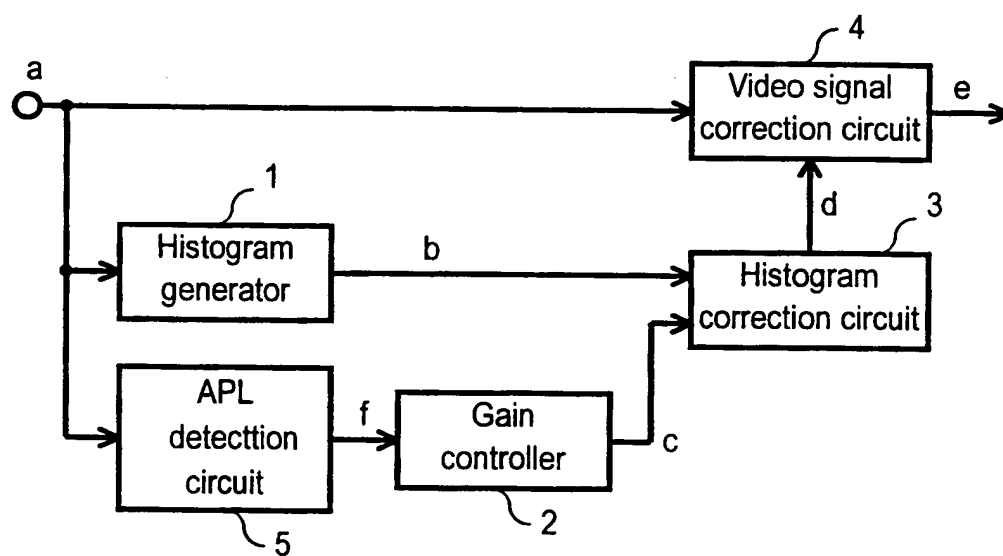


FIG. 2

2/5

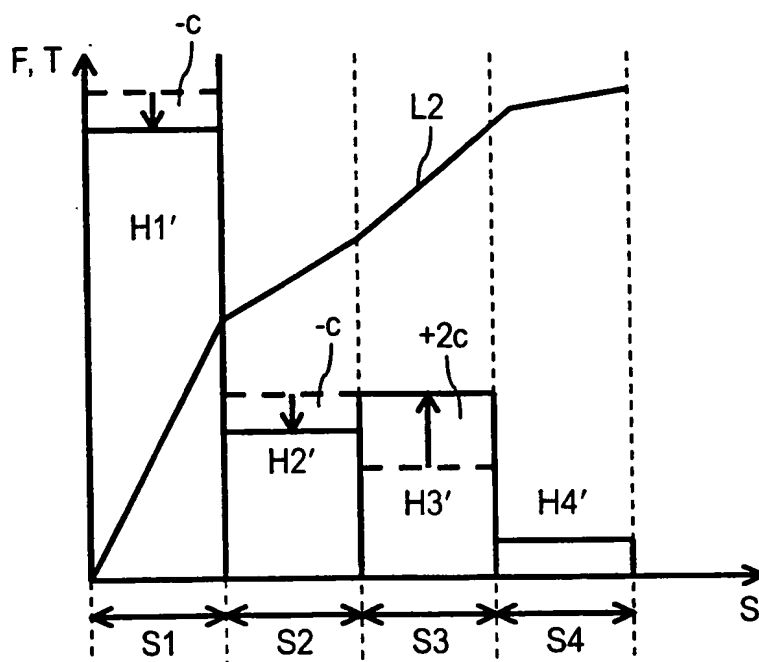


FIG. 3

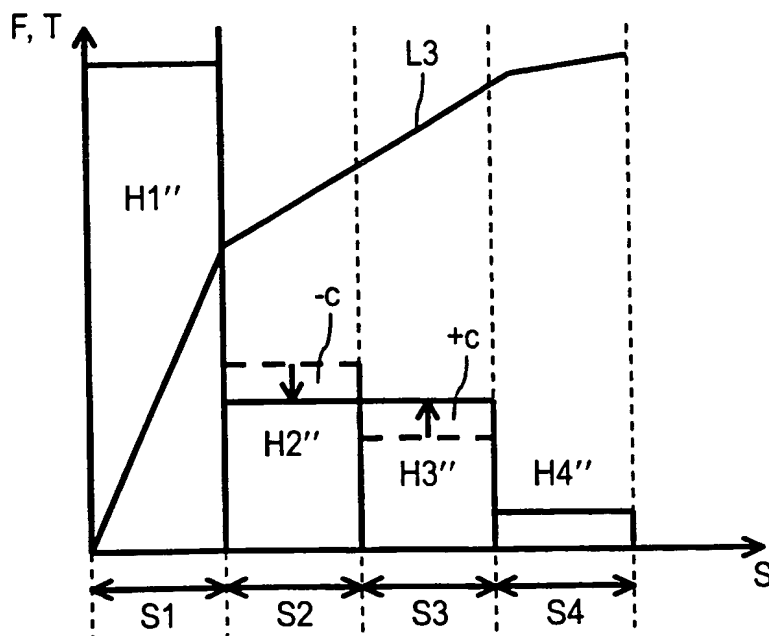


FIG. 4

3/5

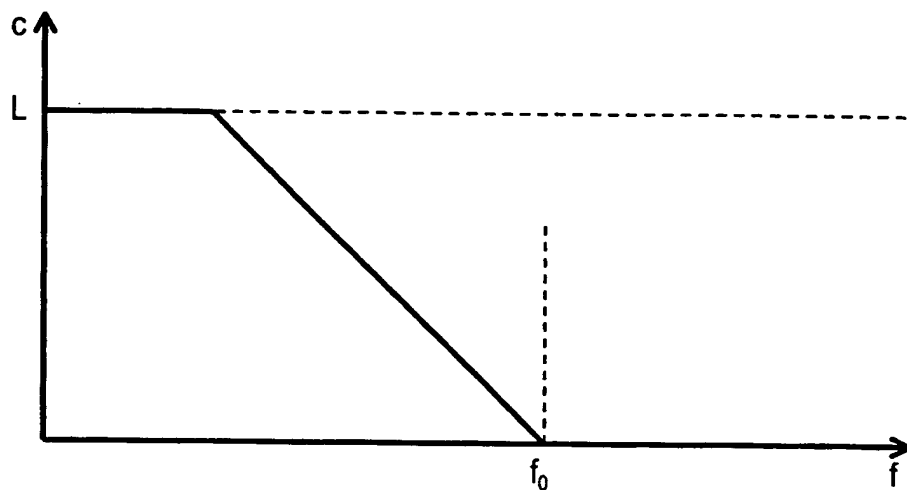


FIG. 5

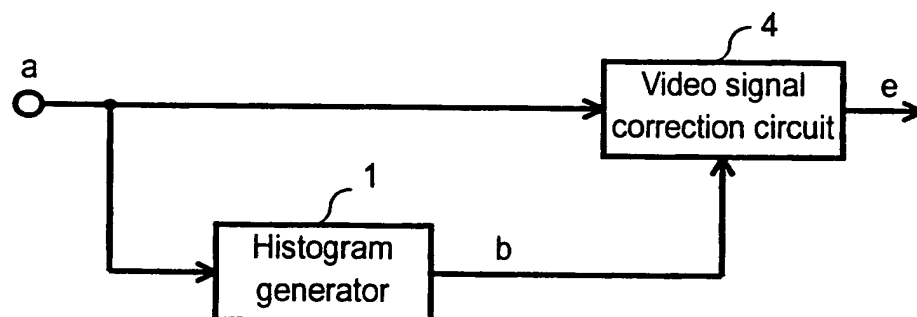


FIG. 6 PRIOR ART



4/5

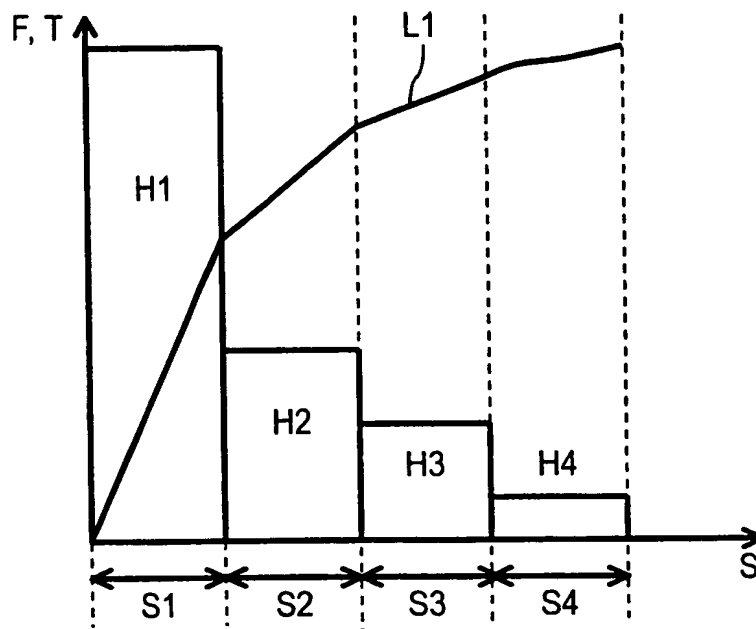


FIG. 7 PRIOR ART

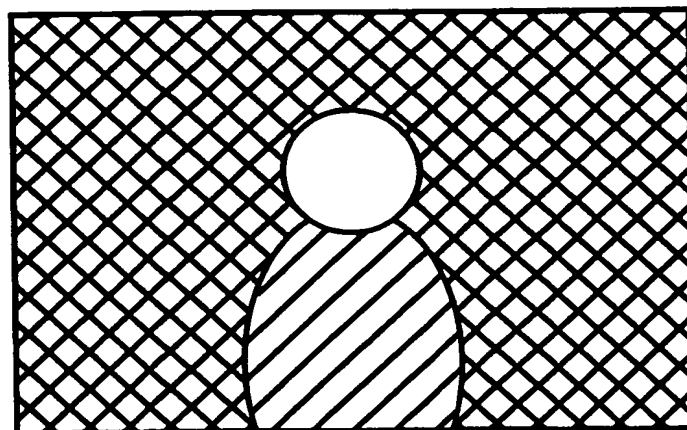


FIG. 8

## Reference numerals

- 1 histogram generator
- 2 gain controller
- 3 histogram correction circuit (histogram controller)
- 4 video signal correction circuit
- 5 average picture level detection circuit (APL detection circuit)
- a input video signal
- b histogram output
- c adjustment value
- d updated histogram
- e output video signal
- S input video signal level
- T output video signal level
- F frequency
- L1, L2, L3 input/output video signal level characteristic
- f APL
- $f_0$  correction starting level

# INTERNATIONAL SEARCH REPORT

International Application No

PC1/JP 98/00920

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04N5/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 516 084 A (MATSUSHITA ELECTRIC INDUSTRIAL CO, LTD) 2 December 1992 see column 7, line 24 - column 11, line 48 ---	1,2
A	US 5 289 282 A (TSUJI T. ET AL) 22 February 1994 see column 6, line 4 - column 9, line 33 ---	1,2
A	US 5 140 649 A (KAGEYAMA A.) 18 August 1992 see column 1, line 21 - column 2, line 64 see column 3, line 33 - column 5, line 15 ---	1
A	US 4 903 145 A (FUNADA M.) 20 February 1990 see the whole document ---	1
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

4 June 1998

Date of mailing of the international search report

16/06/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Verschelden, J

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/JP 98/00920

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 258 740 A (FUJI PHOTO FILM CO. LTD) 9 March 1988 see the whole document -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 98/00920

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 516084	A	02-12-1992	JP 4349784 A	04-12-1992
			JP 4349785 A	04-12-1992
			AU 641320 B	16-09-1993
			AU 1714092 A	11-03-1993
			CA 2069365 A	29-11-1992
			CN 1067347 A, B	23-12-1992
			DE 69224102 D	26-02-1998
			KR 9611974 B	06-09-1996
			US 5289282 A	22-02-1994
US 5289282	A	22-02-1994	JP 4349784 A	04-12-1992
			JP 4349785 A	04-12-1992
			AU 641320 B	16-09-1993
			AU 1714092 A	11-03-1993
			CA 2069365 A	29-11-1992
			CN 1067347 A, B	23-12-1992
			DE 69224102 D	26-02-1998
			EP 0516084 A	02-12-1992
			KR 9611974 B	06-09-1996
US 5140649	A	18-08-1992	JP 2052417 C	10-05-1996
			JP 3239072 A	24-10-1991
			JP 7087587 B	20-09-1995
			AU 624760 B	18-06-1992
			AU 7027291 A	22-08-1991
			CA 2036100 A, C	17-08-1991
			DE 69125869 D	05-06-1997
			DE 69125869 T	14-08-1997
			EP 0442369 A	21-08-1991
US 4903145	A	20-02-1990	KR 9404474 B	25-05-1994
			JP 1906764 C	24-02-1995
			JP 6036552 B	11-05-1994
			JP 63040461 A	20-02-1988
			JP 63040462 A	20-02-1988
			JP 1918493 C	07-04-1995
			JP 6042716 B	01-06-1994
			JP 63040472 A	20-02-1988
			US 5075788 A	24-12-1991

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 98/00920

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 258740 A	09-03-1988	JP 63061578 A	17-03-1988
		JP 1882671 C	10-11-1994
		JP 63061579 A	17-03-1988
		JP 2527165 B	21-08-1996
		JP 63061580 A	17-03-1988
		JP 2004982 C	11-01-1996
		JP 7024424 B	15-03-1995
		JP 63061591 A	17-03-1988
		DE 3751412 D	24-08-1995
		DE 3751412 T	14-12-1995
		US 4899216 A	06-02-1990